


## *Foamatic*

Automatic hygiene station  
for programmable cleaning and disinfection



- Repeatable programmed cleaning and disinfection
- Integrated control unit in the satellite
- Up to 3 chemical product options

# Foamatic

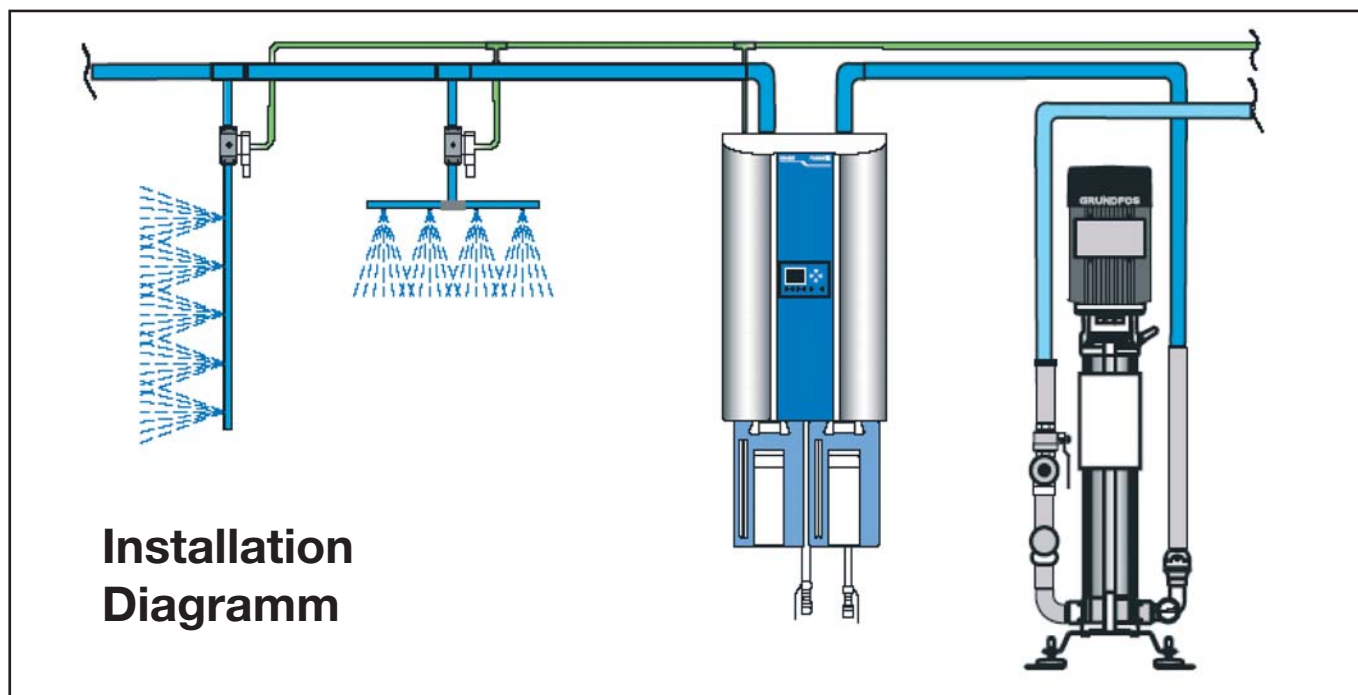

## Features:

- Repeatable and programmed cleaning and disinfection
- Integrated satellite control unit
- Up to 3 chemical product options
- Plug and play function
- Programmable by pc or Laptop, up to 8 programs
- Prepared for data acquisition and external PLC
- Operates with fixed and rotating nozzles
- Optional injector sizes 150L, 300L and 450L foam per min.
- Automatic flushing of injectors
- Equipped with manual outlet for cleaning / disinfection of the surrounding area

## Benefits:

- Hygiene control in restricted / high care areas
- Automatic repeatable function supports cleaning validation
- Automatic logging and data acquisition support HACCP monitoring requirements
- Flexibility of injectors, chemistry and nozzle types allows for a wide field of application. e.g. cleaning of conveyors, fillers, freezers, smoke chambers and tanks

## Technical Data:

Water		
Min./Max inlet pressure	bar	10-25
Consumption during rinsing	L/min.	0-200
Consumption during foaming	L/min.	10-32
Min. water inlet	L/min.	10
Max. Temperature	C°	70
Pipe dimension inlet	Ø	1 1/4"
Pipe dimension outlet	Ø	1 1/4"
Compressed air		
Min./Max. Pressure	bar	5-10
Consumption	NI/min.	200-450
Pipe dimension	Ø	1/4"
Electricity		
Supply voltage	(V/Hz) N-L1	100-250/50-60
Supply voltage	(V/Hz) L1-L2	250-440/50-60
Fuse	(A)	10
General		
Construction		Stainless steel
Dimension mm	H x W x D	830x520x270
Weight	kg	30

**ECOLAB®**